


PRODUCT DATA SHEET

STRAIGHT HOSE CONNECTOR

Our straight hose connector is made from high-quality polyoxymethylene (POM) and is specifically designed for applications in the composite sector – for example, in vacuum infusion or pressure systems.

The material ensures a precise, durable, and reliable connection, even under demanding conditions.

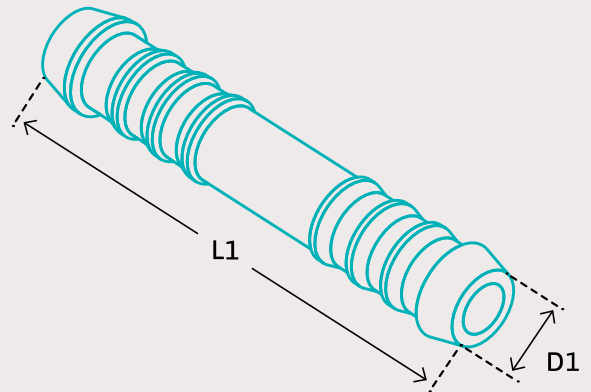

- + High strength
- + Excellent wear resistance
- + Durable and dimensionally stable
- + Temperature resistant from -40 °C to +90 °C, short-term up to +110 °C*
- + High dimensional accuracy

* The temperature resistance depends on the specific application and medium. The customer is responsible for verifying the suitability of the product under their individual operating conditions.

Straight Hose Connector



Item No.	Ø-Hose	PU	Material	D1	L1
SV-06G-100	6 mm	100	POM	6 mm	50 mm
SV-08G-100	8 mm	100	POM	8 mm	55 mm
SV-10G-100	10 mm	100	POM	10 mm	65 mm
SV-12G-100	12 mm	100	POM	12 mm	65 mm
SV-16G-50	16 mm	50	POM	–	–
SV-20G-50	20 mm	50	POM	–	–