


PRODUCT DATA SHEET

TEE HOSE CONNECTOR

Our tee hose connector, made from polyoxymethylene (POM), has been specifically developed for use in the composite sector. Its T-shape allows efficient distribution or merging of media flows.

The polyoxymethylene (POM) used impresses with excellent mechanical properties, low weight, and high dimensional stability – ideal for use under demanding conditions.

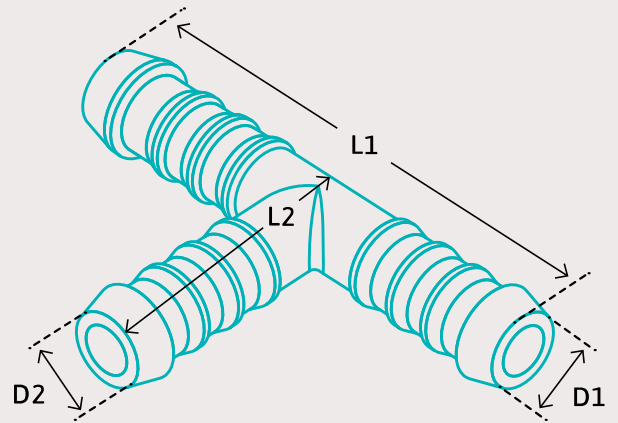

- + High strength
- + Excellent wear resistance
- + Durable and dimensionally stable
- + Temperature resistant from -40 °C to +90 °C, short-term up to +110 °C*
- + Precise dimensional accuracy for a secure fit

* The temperature resistance depends on the specific application and medium. The customer is responsible for verifying the suitability of the product under their individual operating conditions.

Tee Hose Connector



Item No.	Ø-Hose	PU	Material	D1/D2	L1	L2
SV-06T-100	6 mm	100	POM	6/6 mm	50 mm	29 mm
SV-08T-100	8 mm	100	POM	8/8 mm	55 mm	32 mm
SV-10T-100	10 mm	100	POM	10/10 mm	65 mm	37 mm
SV-12T-100	12 mm	100	POM	12/12 mm	65 mm	40 mm
SV-16T-50	Soon 16 mm	50	POM	–	–	–
SV-20T-50	Soon 20 mm	50	POM	–	–	–