
DARGEWITZ composites

PRODUCT DATA SHEET

# STRAIGHT HOSE CONNECTOR

The straight hose connector joins two hose lines of the same or different diameters in a straight line.

Its robust construction ensures a tight, reliable connection even with frequent assembly and disassembly.

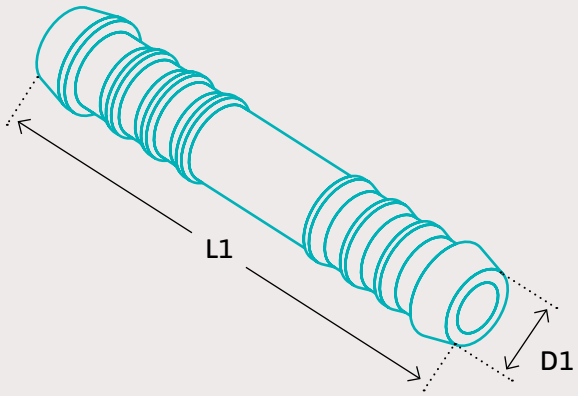


+ High strength and very good abrasion resistance
+ Material: POM – chemical-resistant, dimensionally stable
+ Media: epoxy and polyester resin
+ Temperature: -40 °C to +90 °C, briefly +110 °C*

* The temperature resistance depends on the specific application and medium. The customer is responsible for verifying the suitability of the product under their individual operating conditions.

## Straight Hose Connector



| Item No. | Ø-Hose | PU | Material | D1 | L1 |
|---|---|---|---|---|---|
| SV-06G-100 | 6 mm | 100 | POM | 6 mm | 50 mm |
| SV-08G-100 | 8 mm | 100 | POM | 8 mm | 55 mm |
| SV-10G-100 | 10 mm | 100 | POM | 10 mm | 65 mm |
| SV-12G-100 | 12 mm | 100 | POM | 12 mm | 65 mm |
| SV-16G-50 Soon | 16 mm | 50 | POM | – | – |
| SV-20G-50 Soon | 20 mm | 50 | POM | – | – |

Accessories for composite processing
**Hansemold GmbH** | Am Kielortplatz 132, 22850 Norderstedt, Germany
**P:** +49 40 357 730-41, **F:** +49 40 357 730-44, **E:** info@dargewitz-composites.de, **W:** dargewitz-composites.de